

92 Series - FET Systems - FM - 6 Function with Standard Transmitter

SYSTEM PART NUMBERS

92 1 06 6 Function Receiver with Master + 6 Function Standard Transmitter

SPECIAL ORDER

92 1 07 7 Function Receiver + 10 Function Standard Transmitter

REPLACEMENT TRANSMITTERS

92 1 06TX 6 Function Standard Transmitter
 92 1 10TX 10 Function Standard Transmitter



SYSTEM CONTENTS

- 1 x Standard Transmitter
- 1 x Lo-Cover
- 1 x Lanyard
- 1 x Receiver
with Wiring Harness
and Glands
- 1 x Instructions

STANDARD TRANSMITTER SPECIFICATION

SWITCH

Type Tactile Dome

POWER

Battery 9V Alkaline Manganese (GP 1604A – JIS 6LF22 – IEC 6LF22 – Eveready 522 – Duracell MN1604)

AMPS

Quiescent 15 micro amps
 Operating 20 milliamps

PROTECTION

Reverse polarity Protected
 IP Rating 55
 Conformal coating No
 Registration codes Over 16 million

PERFORMANCE

Temp Range -10° C to + 40° C (13° F to + 104° F)
 Range Nominal 60 metres (200 ft) from the Receiver, when driving a momentary output without signal drop out
 Transmitted power 1 mW Typical

COMPLIANCE

EMC Exceeds ETSI 300 220
 Modulation FM
 Frequencies 418 MHz F1D USA (optional UK)
 433.92 MHz F1D World wide (optional USA)

RECEIVER SPECIFICATION

SWITCH TYPE

Output Switching MOS Field Effect Transistor (P Channel Power MOSFET)

SUPPLY VOLTS

Nominal 12/24 Volts DC
 Absolute Maximum 40 Volts DC
 Minimum 8 Volts DC
 Output Switch Supply Internal 12/24 Volts

AMPS

FET Rating 15 Amps
 System Rating 15 Amps
 Quiescent Current 25 mA on Standby (Not SET)
 Overload Protection 15 Amps (Auto Shutdown)

AERIAL

Internal Antenna Yes Supplied and fitted
 External Antenna Optional See Accessories.

OUTPUTS

Master 1 Parallel or Continuous
 Function 6
 Master (Secondary) 1 Continuous

CONFIGURATION

RS232 Programming Yes
 to users requirements

PERFORMANCE

Simultaneous Outputs Yes With horizontal interlocks (Interlocks are programmable – see CONFIGURATION above)
 Instant Tx response Yes No perceivable delay between TX operation and RX action

DIAGNOSTICS

LED's Yes Confirm 5 Volts, SET, Fault and all Outputs.

PROTECTION


ESR Safety Yes See ESR Safety document.
 Reverse Polarity Yes Protected (with provisions)
 Back EMF Yes Diode protected on all outputs
 Conformal Coating Yes
 Registration codes Over 16 million
 STOP Connection Yes Internal Emergency Stop Connection

WIRING

Wiring Loom Yes 3 metres (10ft) supplied and fitted
 Cable Gland Yes Supplied and fitted
 Connections Screw terminal into plug and socket on PCB, for easy "swap out"

ENCLOSURE

Weight 0.3 lbs (335gms)
 Lid Smoke PVC - to view LEDs
 Base Black PVC
 Breather Gortex fitted in base
 Mounting 4 external lugs
 Fixings 5mm (3/16") not supplied
 IP Rating Performs to IP67 standard
 (0.5 metre water for 1 hour)

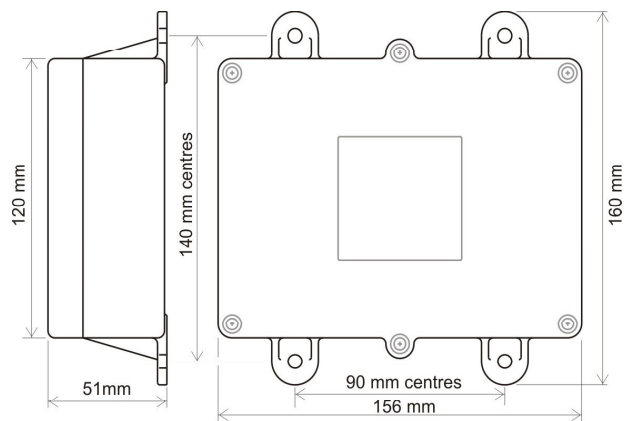

ACCESSORIES


9861, 9862, 9863 and 9869 – External Antenna with cable.

92 Series			92 1 06	92 4 06
BUILD SPECIFICATION TABLE FOR MODELS IN THIS RANGE				
Ident	Legend	Connection		
	+ - F1 F2	Positive, Negative, F1 and F2	S	S
	F3 F4 F5 F6 M	F3, F4, F5, F6 and Master	S	S
	ST -	STOP and -	S	S
	S+ S-	S+ S-	S	S
	ANT	Internal Antenna	S	S
X5		SMA Connector (external antenna)	S	S
LK1	P	Master - Parallel	C	C
LK2	C	Master – Continuous	C	C
LK3	RS232	RS232	S	S
		3 metres 2 core	S	S
		3 metres 7 core	S	S
		9804 Lo-Cover	S	
		9802 Lo-Cover		S


S = Standard. C = Customer configured (see "Factory Settings").

+	Positive 12/24 Volt supply
-	Negative 0 Volts
F1, F2, F3, F4, F5 & F6	Outputs to F1 through F6
M	Master Output
STOP -	STOP, when grounded shuts down the Receiver
S+ S-	Master Secondary for Safety solenoid connections etc.
ANT	Blade connector for internal antenna
SMA	Aerial connection for optional external antenna (internal antenna must be removed)
LK1	Jumper fitted to this link for continuous Master
LK2	Jumper fitted to this link for parallel Master
Factory Settings	418MHz configured Parallel, 433.92MHz configured Continuous
LK3	RS232 for interface to access special programmes Also for connection to RS232 modules

PCB – Not to scale

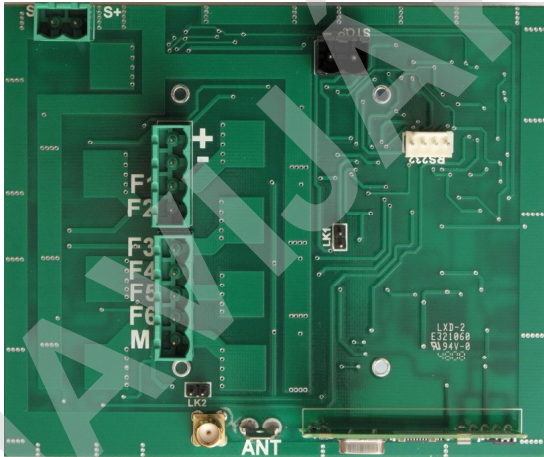

Connector Side

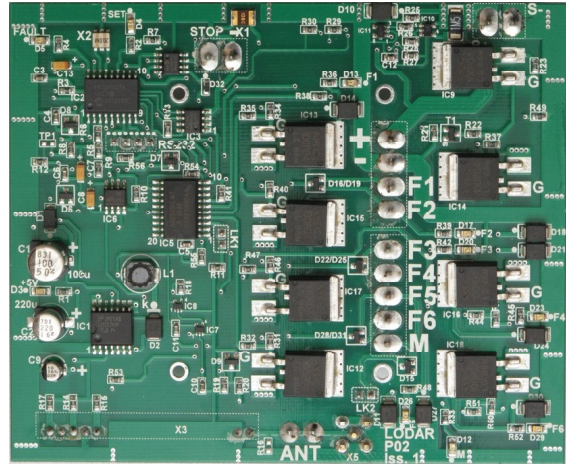

Component Side